Preparation

1 | UNFOLD

Remove Signus from its trolley and unfold the frame.



4 | ANCHORING First anchor the leg that is facing the wind.





Inflate

7 | INFLATE ROOF Plug the electrical pump firmly in one of the open valves. Inflate the 3 roof segments one by one.



8 | INFLATE LEGS

Plug the electrical pump firmly into one of the open valves. Inflate the 3 leg segments one by one.



Positioning

9 | POSITIONING LEGS Push the 3 legs about 1 feet (30cm) to the centre of the Signus for a symmetric shape. Anchor the remaining legs.



2 | POSITIONING

5 | CLOTHS

Use the inner zipper for

water repellent cloths.

ABOUT THE PRESSURE

Use the outer zipper

for printed cloths.

are facing upwards.


Make sure all the valves

10 | ANCHORING

Allways anchor the tent by using the 2 remaining anchor points. Place the pegs deeply into the ground and under an angle of 40 degrees.









6 | ATTACH CLOTHS Start with connecting the zippers at the top then connect the sides



ZIPPERS





Inflate untill the tube feels very solid (3PSI/0.2 BAR). The remaining air will escape through the overpressure valve.















Deflate

10 | DEFLATE Deflate Signus by opening the six inflation valves. Do not remove the overpressure valves.

Do not storage the Signus when it's wet. Hang both frame and cloths in a dry environment.





Folding & storage









Do's and dont's

Do not use sharp objects



Do not use chemicals for cleaning



Do not use near an open fire or heated objects



Do not store the Signus when it's wet



Can be used till 6 bft.



Pressure (3PSI/0,2 BAR)



Anchor with pegs on soft



Anchor with concrete blocks on hard ground

Tube

NEVER LEAVE THE SIGNUS UNATTENDED AND TAKE CARE OF YOUR BELONGINGS

AFTER USE OF THE SIGNUS ONE STORE IT IN A DRY PLACE Never store a wet tent. Hang out all the cloths and the tube in a dry and warm place.

CLEANING

Only use water with a soft handbrush and a wet cloth to clean the tent. Do not use any cleaning products.

Parts

White clothes 3x





Custom clothes 3 x







Inflate / Deflate Valves 6x+2 spare valves



Overpressure valves 6x+2 spare valves



Knee caps







Accessories optional

Accessory bag



Electrical pump



Steel pegs 3 x

Blue screw pegs

Watch explainer video









TECHNICAL SPECIFICATIONS

	5M	6M
OUTER DIAMETER	5.00M	6. 20M
HEIGHT	2.93M	3.30M
ENTRANCE HEIGHT	2.20M	2.48M
FLOOR AREA	20M2	30M2
CANOPY AREA	25M2	37M2
DIAMETER INFLATABLE TUBE	0.23M	0.26M
WEIGHT INFLATABLE TUBE	12KG	15KG
WEIGHT TOTAL PACKAGE	25 KG	30 KG

MATERIALS

MATERIAL INFLATABLE TUBE	180 GRAMS DACRON BLACK
STANDARD CLOTH	75 GRAMS WATER REPELLENT POLYESTER
FULL COLOUR PRINTED CLOTH	100% POLYESTER 115GR










Inflatable Frame

Adaptable Cloths

Wind proof till bft 6

Fire retardant

3 LAYER SYSTEM

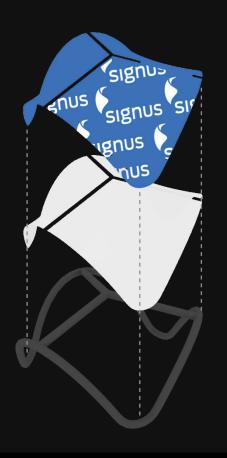

3. FULL COLOUR COVER PRINT

2. WATTER REPELLENT CLOTH (Only used outdoors)

1. INFLATABLE FRAME

3 SEPERATE CLOTH TO DESIGN



